



AquaSol 195

— 0/+5 WP POSITIVE TOLERANCE

💧 WATER PUMP USE

✓ HIGH QUALITY

25 year linear performance warranty
10 year product warranty




aquaSol

The high voltage solar panels
designed for solar pumping




AquaSol 195

35.0 (D)

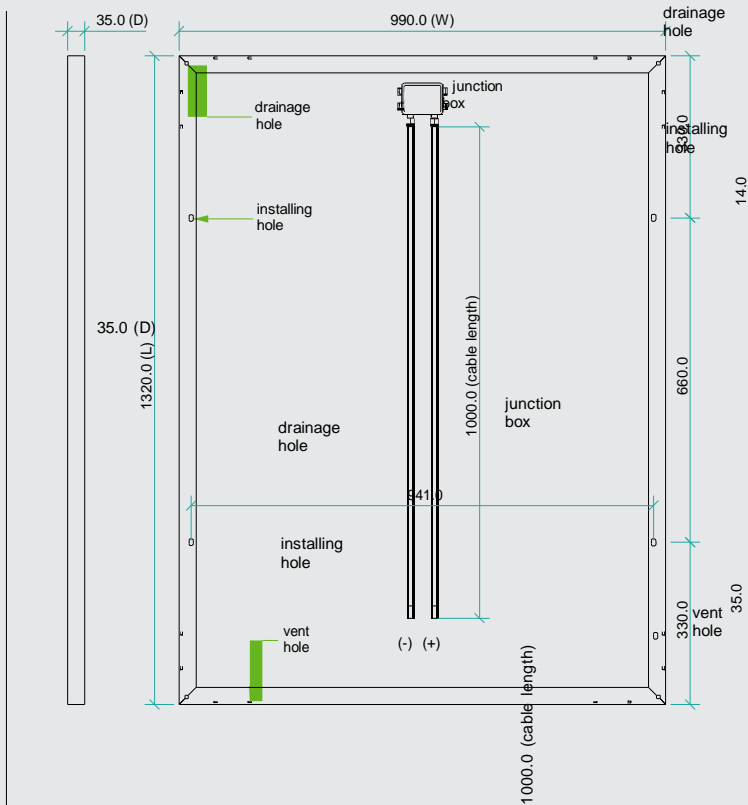

General characteristics

Cell	polycrystalline solar cell 156 x 104 mm
No. of Cells (Connections)	72 (6 x 12)
Panel Dimensions	1320 x 990 x 35 mm
Weight	14.5 kg
Connectors and Cables	Connectors and 1m cables

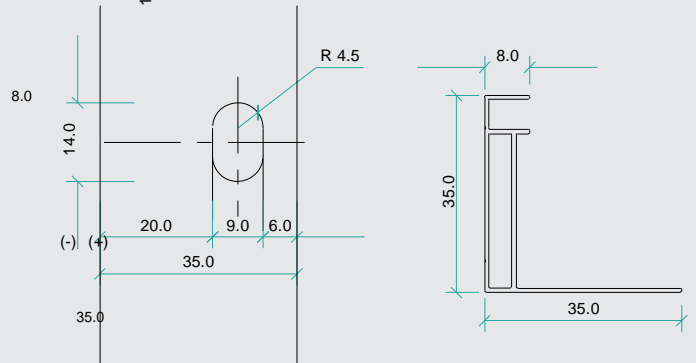

Thermal conditions

Normal Operating Cell Temperature 800W/m ² irradiance, 20°C, AM = 1.5	48°C ± 2°C
Power temperature coefficient	- 0.5%/K
Current temperature coefficient	0.035%/K
Voltage temperature coefficient	- 0.37 MV/K

Limits

Operating temperature	-40°C to + 85°C
Maximum system voltage	1000V DC

Electric performance at STC *

Maximum Power	195 W
Power tolerance	0/+5 Wp
Maximum power voltage	36.3 V
Maximum power current	5.37 A
Open circuit voltage	45.5 V
Short circuit current	5.75 A

*Standard Test Conditions : 1000W/m² irradiance, 25°C and AM = 1.5

High performance

25 25 Years
linear performance

10 10 Years
product warranty

