

PRODUCT SPECIFICATIONS

Revov 2nd LiFe 51.2 V 2nd LiFe Battery system for stationary Energy Storage



www.solarpanelenergy.co.za

Models: 200Ah (10.2kWh), 220Ah (11.2kWh)

The REVOV 2nd LiFe 51.2V energy storage system is a Lithium Iron Phosphate based system utilising 2nd LiFe Electric Vehicle batteries to provide backup, primary and secondary power in Residential, Commercial, Industrial and Utility applications where daily cycling of the system is required. The system offers unrivalled value in terms of Life Cycle cost and Capital outlay, with class leading energy density, life time, cycle life and high temperature performance

APPLICATION

- Telecom Base Stations
- Data Centres
- Residential Backup
- Solar, Wind and Hybrid Storage
- Peak Shaving
- Off-Grid Living and Working

COMMUNICATION

- Communication interface (RS485, Modbus)



BATTERY MANAGEMENT SYSTEM FUNCTION

- Charge and Discharge Current
- Hardware protection
- Discharge control
- Charge control
- Cell voltage detect
- Cell balance
- Temperature detect
- Communication(RS485)
- PACK voltage detect
- Fault alarm
- Cell sample lines
- Short circuit protection
- Can identify large capacitance
- Capacity of the display
- Temperature detect
- Communication(RS485)

INDUSTRIAL VISION

- REVOV 2nd LiFe batteries have been developed and qualified to suit the demanding requirements of performance and operational reliability of our customers
- Cell manufacturing is carried out on established industrial production lines
- Manufacturing plants comply with the legislation in force in each country and with international quality standards ISO9001 Qs9000
- Re-purposing of EV batteries is the only way to reduce environmental impact

FEATURES

- Lithium Iron Phosphate (LiFePO₄)
- Supports parallel connection
- Lifetime exceeds 10 years at 25 °C
- External BMS (24 or 48 v)
- Lighter than competing Lead or Gel alternatives
- No active cooling required

ADVANTAGES

- Unmatched Cost per Cycle
- Best Safety Record of All Lithium Chemistries
- Good High Temperature Performance
- Remote Management Capabilities

NOMINAL SPECIFICATIONS

Nominal Voltage (V)	51.2 (25.6V x 2)
Capacity (C/2) (Ah)	200 / 220
Energy (C/2) (Wh)	10,240 / 11,264
Maintenance	Charge the battery every 6 months when in storage

MECHANICAL SPECIFICATIONS


Width (mm)-BMS	483
Height (mm)-BMS	42
Depth (mm)-BMS	280
Weight (kg)-BMS	3.6kg
Width (mm)-Battery	442mm
Height (mm)-Battery	170mm
Depth (mm)-Battery	563mm
Weight (kg)-Battery	53kg

FOR MORE INFORMATION PLEASE CONTACT


FOR MORE INFORMATION PLEASE CONTACT

+27 84 442 4235

inquiry@solarpanelenergy.co.za

 Solar Panel Energy (Pty) Ltd
204 Louis Trichardt Blvd
Vanderbijlpark

WWW.SOLARPANELENERGY.CO.ZA

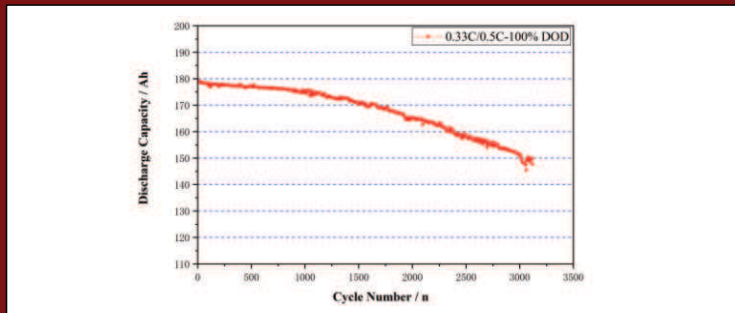

ELECTRICAL SPECIFICATIONS

Charge Voltage (V)	Float Charge	54.5
	Boost/Absorption charge	55.5
	Battery Disconnect	50 - 49.5
Recommended Charge Current		0.5C
Max Charge Current		0.75C
Max Output Power (Wh)		10,240 / 11,264
Recharge Time (h)		0.5C*2hr (standard)
Nominal Voltage (V)		51.2
Capacity (Ah)		200 / 220

OPERATING CONDITIONS

Lifetime @+25°C	10 years
Cycle life (90%DOD,+25°C)	3,500
Operating temperature	Charge :0~50°C; Discharge:-20~55°C;
Transport regulation compliance	UN3480
Storage temperature	Short-term storage: -10~+45°C (<3 months, SOC: 20%~60%) Long-term storage: -10 ~+40°C (<1 year, SOC: 30%~60%)
EMC standard compliance	EN 61000 chapter 4.2,4.3,4.5,4.6/EN55022
Certificate	TUV SUD/CE/ UL1642/UN38.3
Protection class	IP20
Warranty	10yrs or 3500 cycles at 1 cycle per day (whichever arrives first)